



**TOWN OF
LONGBOAT KEY**
INCORPORATED NOVEMBER 14, 1955

Kari L. Kennedy, CPPB
Purchasing Manager
501 Bay Isles Road
Longboat Key, FL 34228-3196
(941) 316-1943
Kkennedy@Longboatkey.org

IFB 19-002 LIFT STATION C FORCE MAIN REPLACEMENT

ADDENDUM #5

Subject: Questions & Answers

Date: November 13, 2018

ALL CONTRACTORS MUST ACKNOWLEDGE RECEIPT OF THIS ADDENDUM BY
SIGNING BELOW AND SUBMITTING THIS EXECUTED DOCUMENT WITH THE BID.

Contractors are hereby notified that this Addendum shall become part of the submitted bid and the subsequent documents, if applicable.

The following items are issued to add to, modify, and clarify the IFB and all associated documents. Bids shall conform to the additions and revisions listed herein. These items shall have full force and effect as the Bid and all associated documents.

Contractor Name: _____

Address: _____

Phone Number: _____

Email: _____

Authorized Signature: _____

Printed Authorized Name: _____

ATTACHMENTS:

Figure No. 1: Gulf of Mexico Drive Pavement Restoration Detail; Dated 11/12/18; labeled as : LIFT STATION C FM REPLACEMENT FOR TOWN OF LONGBOAT KEY ADDENDUM 5”

QUESTIONS:


Question 1: We are in receipt of Addendum Four and take issue with the flowable fill as base material and ask that a detail as required by Note 25, second sentence, on plan sheet C-3, be provided that specifically addresses surface restoration work in the Florida Department of Transportation’s right-of-way. Currently, there is no detail addressing this scope of work. Please provide.

Answer: Please see attached Figure 1 including a detail for FDOT Right-of-Way pavement restoration on Gulf of Mexico Drive.

Question 2: The revised bid form issued in Addendum Three does not have bid items for the structural asphalt courses needed for both the Manatee County detail and the F.D.O.T. requirements per Note 25, please add these bid items.

Answer: Work Within FDOT Right-of-Way: Bid Item 8, Sub-Item Base (FDOT Right-of-Way) is intended to include the “FULL DEPTH” limits of restoration per FDOT Note 25 on Sheet C-3 and as shown on Sheet C-12. Sub-Item Overlay (FDOT Right-of-Way) is intended to include Milling limits of restoration per FDOT Note 25 on Sheet C-3 and as shown in Sheet C-12. The Contractor is required to comply with FDOT standards.

Work Outside FDOT Right-of-Way. Bid Item 8, Sub-Item Base (Binnacle Point) is intended to include the full base replacement limits of restoration per Manatee County Public Works Department standard detail UG-12 included in Sheet C-17 and as shown on Sheet C-9. Sub-Item Overlay (Binnacle Point) is intended to include Milling limits of restoration per Manatee County Public Works Department standard detail UG-12 included in Sheet C-17 and as shown in Sheet C-9. The Contractor is required to comply with Manatee County Public Works standards.

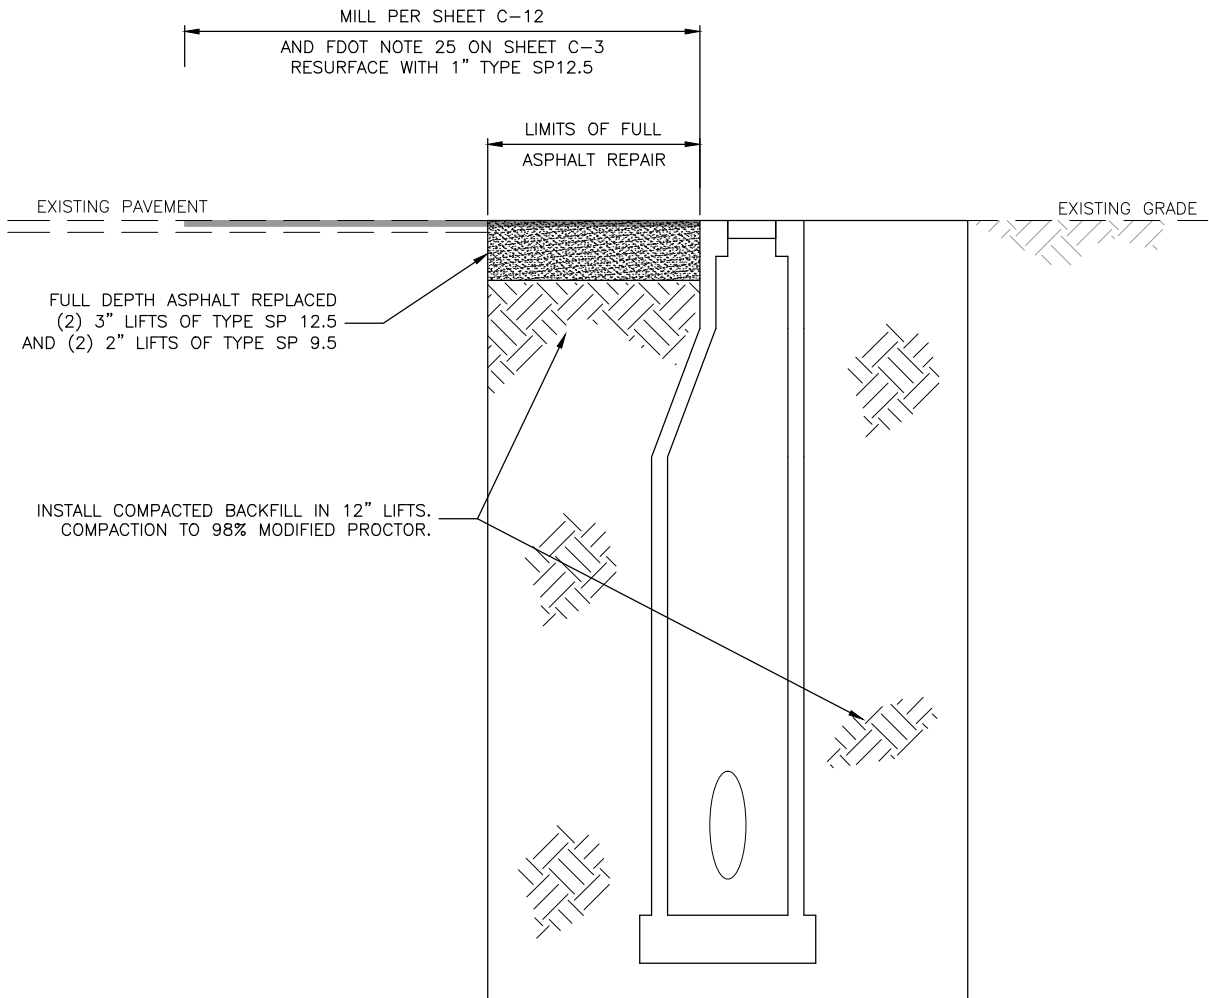

GULF OF MEXICO DRIVE PAVEMENT RESTORATION

1 **DETAIL**
 - SCALE: NTS

PLOTTED November 12, 2018, 1:50 PM PLOTTED BY: SONNENBERG, TERENCE
 S:\PROJECTS\1220\WATERWASTE\TOWN OF LONGBOAT KEY\LIFT STATION C FM REPLACEMENT\900-CAD_GIS\20-SHEETS\DETAILS.DWG



AECOM Technical Services, Inc.
 7650 West Courtney Campbell Cswy, Suite 700
 Tampa, Florida 33607
 Ph: (813) 286-1711 Fax: (813) 286-6587
 Certificate of Authorization No. 8115



**Town of
 Longboat
 Key**

**LIFT STATION C
 FM REPLACEMENT**
 FOR
 TOWN OF LONGBOAT KEY
 LONGBOAT KEY, FLORIDA

PROJECT NO. 60545061
DESIGN/APVD TS/FB
DATE 11/12/18
FIGURE NO. 1